Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

SPECIFICATION SHEET

DATE: JAN.14,99'.
NO.: HN99011402
PAGE: 1/2

CUSTOMER NAME:
TYPE: HN-GH35GMB TYPE
MODEL NO.: HN-GH12-1634T
CUSTOMER PART NO.:

Jameco Part Number 161381

I. OUTER DIMENSIONS :

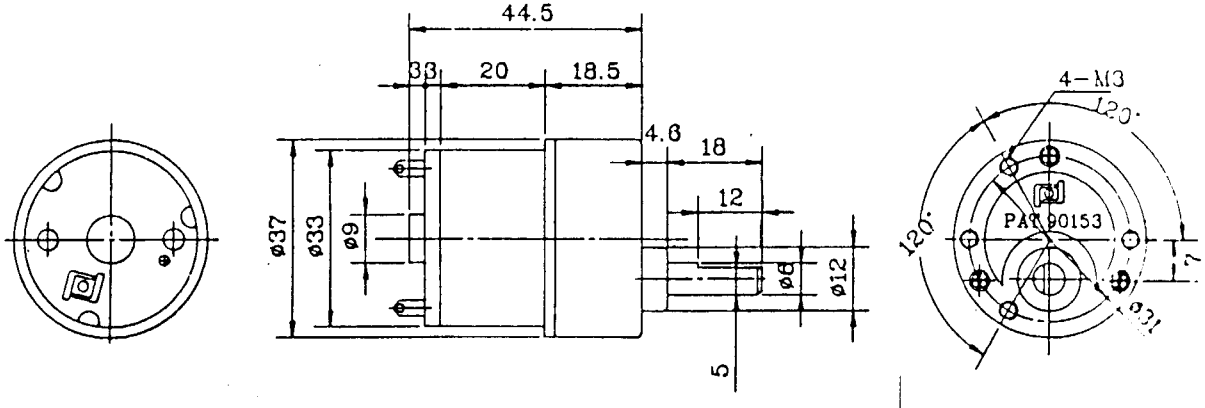

SPECIFICATION SHEET

DATE: JAN.14,99'.
NO.: HN99011402
PAGE: 2/2

CUSTOMER NAME:
TYPE: HN-GH35GMB TYPE
MODEL NO.: HN-GH12-1634T
CUSTOMER PART NO.:

II. SPECIFICATIONS:

1. RATED VOLTAGE: DC 12V

2. DC VOLTAGE OPERATING RANGE: DC 4.5 - 12V

3. TORQUE (LOAD) AT MAXIMUM EFFICIENCY : 850 g-cm

4. STALL TORQUE: 3.60 Kg-cm

5. NO LOAD SPEED: 200PM +/-10%

6. SPEED AT MAXIMUN EFFICIENCY (UNDER LOAD AT 850g-cm): 145RPM +/- 10%

7. NO LOAD CURRENT: MAX. 111 mA

8. CURRENT AT MAX. EFFICIENCY (UNDER LOAD AT 850 g-cm): MAX. 293 mA

9. SHAFT END PLAY: MAX. 0.8m/m

10. INSULATION RESISTANCE: 10M OHM

11. DIELECTRIC STRENGTH: 300V DC

12. GEAR RATIO: 30:1